




High Power Termination Description

- Operating Frequency 1.12 – 50.00 GHz
- Full band VSWR 1.10:1 MAX
- Power Handling 250 to 3000 WATTS
- Waveguide Is Standard Copper/Brass or Aluminum (6061)
- Pressurized
- Finish: High Temperature Flat Black*
- RoHS Compliant

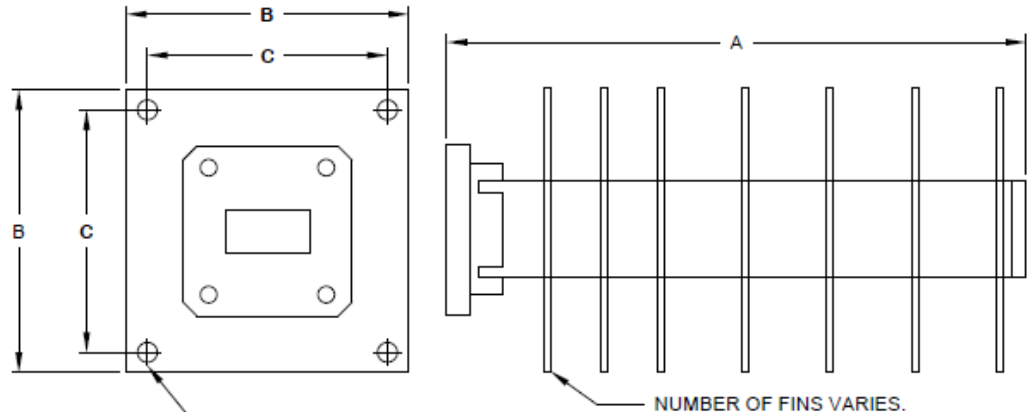

Waveguide Flanges:

1. Cover
2. Choke
3. CPRF
4. CPRG
5. CMR
6. Cover Grooved
7. CAR
8. PAR
9. UAR
10. CBR
11. PBR
12. UBR
13. UDR
14. RDR
15. PDR

HOLE "D" 8 PLACES.
 LOCATED ON FIRST AND LAST FIN.

P/N	WR Size	Freq. (GHz)	Power Handling (W)	Dim "A" (in)	Dim "B" (in)	Dim "C" (in)	Dim "D" (in)
2485	28	26.50 - 40.00	250	5.50	2.50	2.00	0.203
2484	42	18.00 - 26.50	500	7.50	3.50	3.00	0.203
2483	62	12.40 - 18.00	1000	11.00	5.00	4.00	0.265
2482	75	10.00 - 15.00	1000	11.00	5.00	4.00	0.265
2481	90	8.20 - 12.40	1000	11.00	5.00	4.00	0.203
2480	112	7.05 - 10.00	1000	11.00	5.00	4.00	0.265
2479	137	5.85 - 8.20	1500	9.50	5.00	4.00	0.265
2478	159	4.90 - 7.05	1500	18.00	5.00	4.00	0.265
2477	187	3.95 - 5.85	1500	14.00	5.00	4.00	0.265
2476	229	3.30 - 4.90	1500	21.00	6.00	5.00	0.265
2475	284	2.60 - 3.95	2000	15.00	6.00	5.00	0.265
2474	430	1.70 - 2.60	2000	18.00	8.00	8.00	0.265
2473	650	1.12 - 1.70	3000	35.00	10.00	9.00	0.265

Special Flange List as: FSXX

Part Number Example: 2484-1A

P/N	Flange	Material A=Aluminum B=Brass
2484	1	A

*Other finishes are available upon request