


## Medium-High Power Termination Description

- Operating Frequency 2.60 – 50.00 GHz
- Full band VSWR 1.10:1 MAX
- Power Handling 40 to 1200 WATTS
- Waveguide Is Standard Copper/Brass or Aluminum (6061)
- Pressurized
- Finish: High Temperature Flat Black\*
- RoHS Compliant

### Waveguide Flanges:

1. Cover
2. Choke
3. CPRF
4. CPRG
5. CMR
6. Cover Grooved
7. CAR
8. PAR
9. UAR
10. CBR
11. PBR
12. UBR
13. UDR
14. RDR
15. PDR

Special Flange List As: FSXX

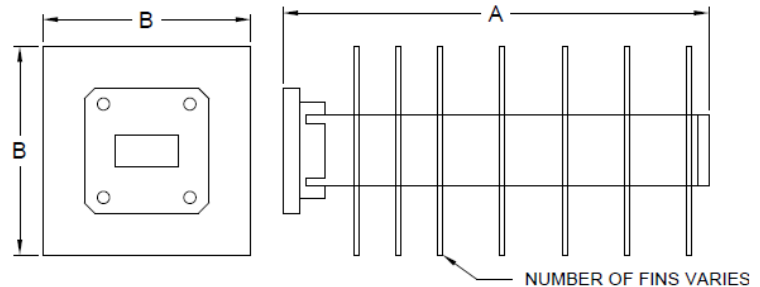

P/N	WR Size	Freq. (GHz)	Power Handling (W)	Dim "A" (in)	Dim "B" (in)
2459	22	33.00 - 50.00	40	2.00	1.00
2460	28	26.50 - 40.00	100	4.00	1.50
2461	42	18.00 - 26.50	150	3.75	2.00
2463	51	15.00 - 22.00	150	3.75	2.00
2400	62	12.40 - 18.00	200	4.00	2.50
2400	75	10.00 - 15.00	250	5.00	2.50
2400	90	8.20 - 12.40	350	6.00	3.00
2464	102	7.00 - 11.00	400	6.50	3.50
2400	112	7.05 - 10.00	425	7.00	3.50
2269	137	5.85 - 8.20	500	8.00	3.50
2121	159	4.90 - 7.05	625	8.00	3.50
2466	187	3.95 - 5.85	750	8.50	4.50
2439	229	3.30 - 4.90	1000	10.00	5.00
2469	284	2.60 - 3.95	1200	11.50	6.00

Part Number Example: 2459-1A

P/N	Flange	Material A=Aluminum B=Brass
2459	1	A

\*Other finishes are available upon request

Data Sheet T4 r1